




How to disengage the main conveyor motor and re-engage it

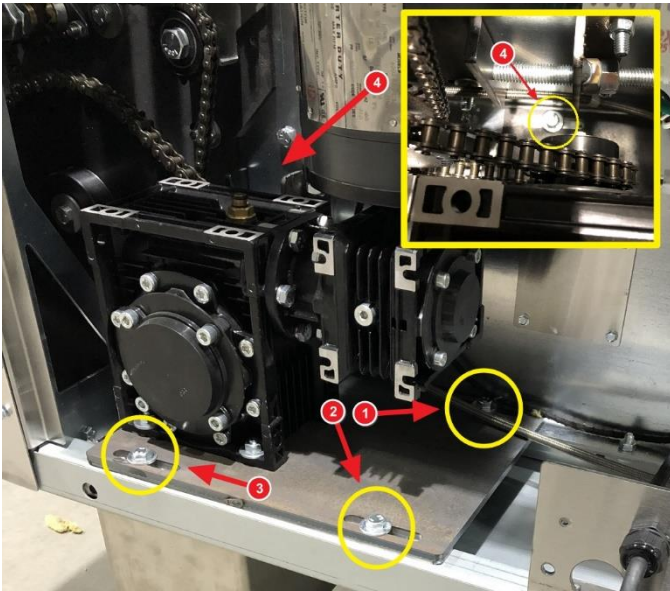

1- Unscrew the 4 bolts that hold the plate in place.

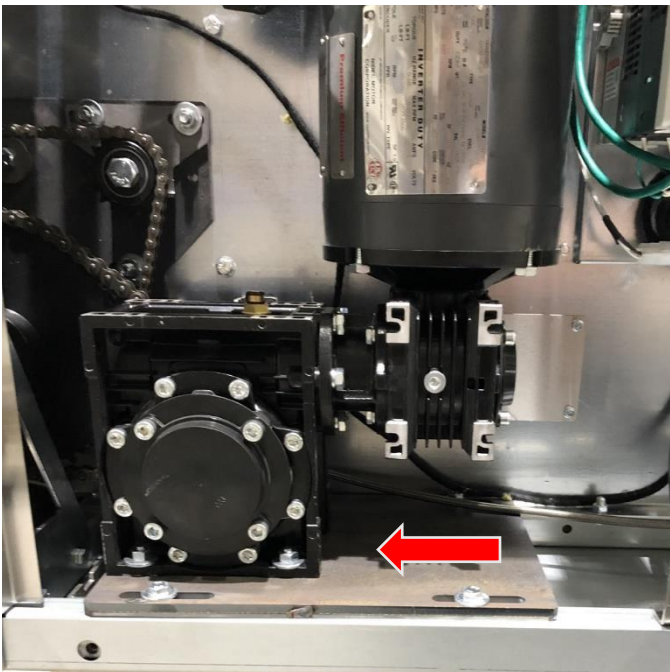


2- Push the drive system fully forward.

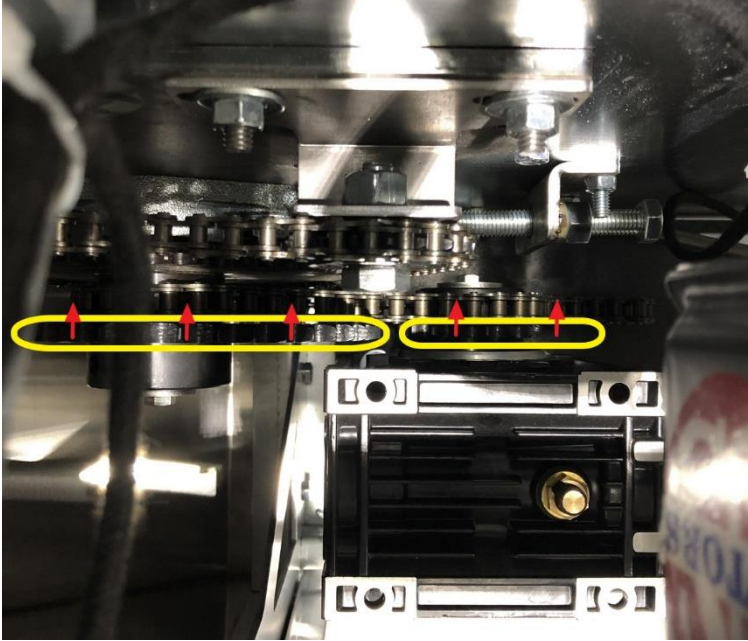


3- Move the chain on the flat part of the two gears.

You can now rotate the main conveyor freely or run the motor without load.



To engage the motor to the main shaft:

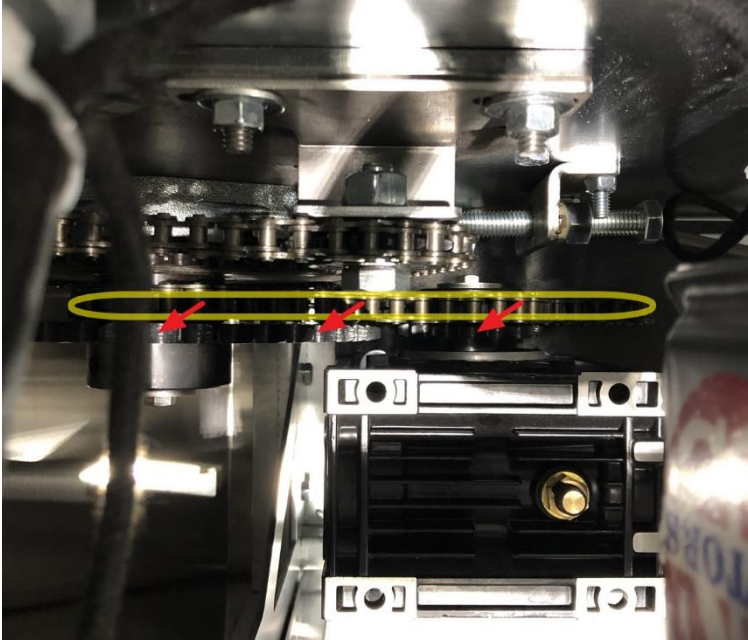

1- Put the chain on the teeth of the gears.

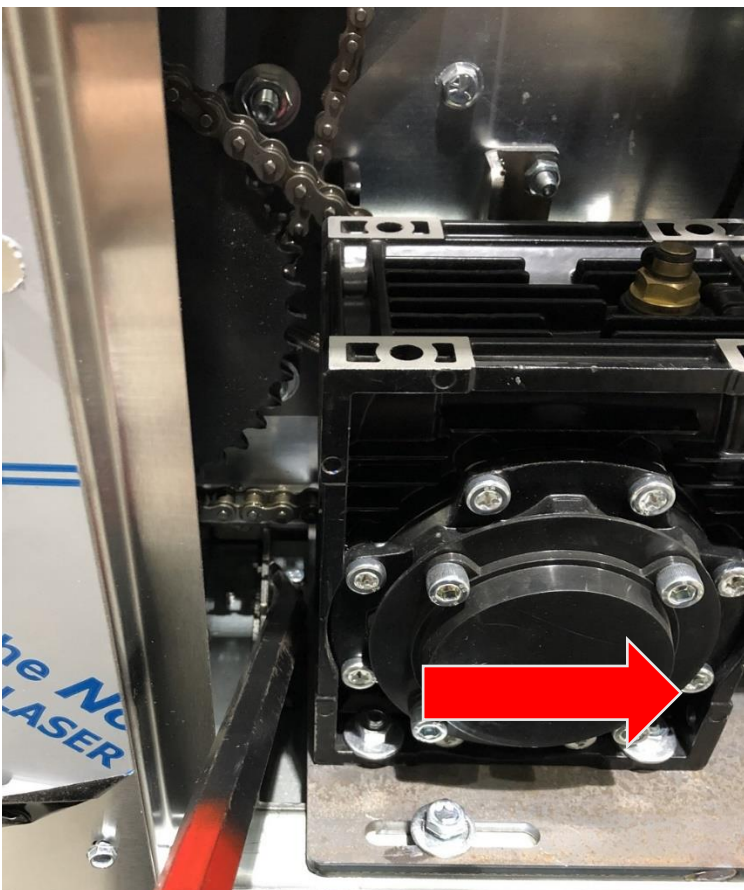


2- Move the drive system to the right with a lever.

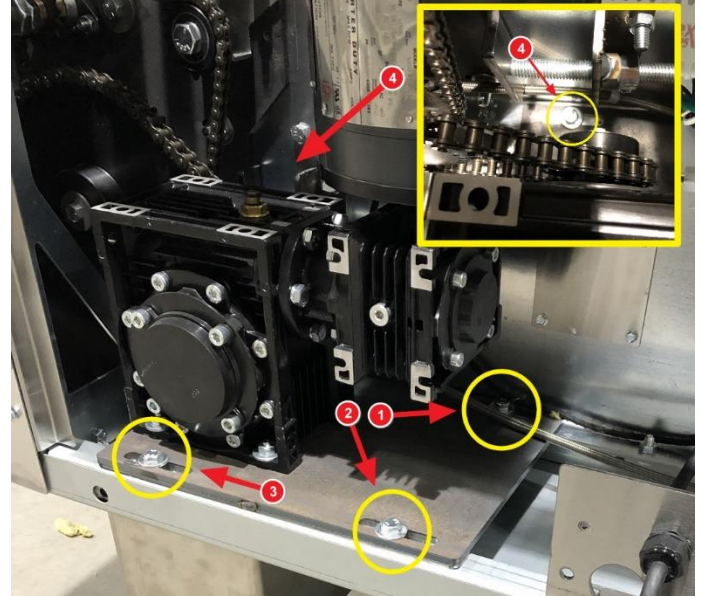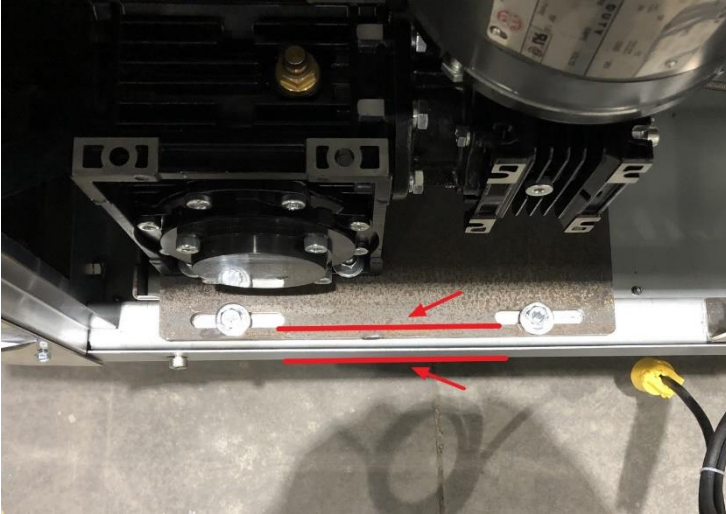

3- Keep the drive system parallel to the edge of the oven.

4- Keeping the drive system to the right with slight pressure, screw the 4 bolts of the support plate.

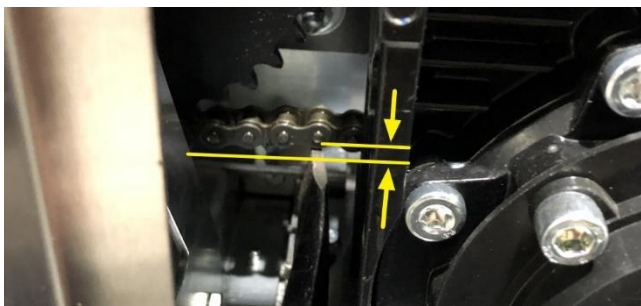

5- The chain should not be too tight. It must be able to move with a maximum of 1/4 in”.